

32" CHANNEL DRAIN FLAT GRATE ANTI-ENTRAPMENT SUCTION OUTLET COVER AND PVC THREE-PORT MANUFACTURED SUMP

VGB Series

The AquaStar line of suction outlet covers, compliant with the Virginia Graeme-Baker Pool and Spa Safety Act (ANSI/APSP 16-2011 and NSF/ANSI 50-2009a)

FEATURES

For single or multiple drain use (see installation instructions for plumbing, hydrostatic valve/drain pipe and single or multi-pump connections)

Single

Floor: 316 GPM at 3.9 fps

Wall: 208 GPM at 2.6 fps

Floor/wall: 122 GPM at 1.5 fps

Floor/wall: 80.7 GPM at 1.0 fps

25.9 square inch opening

#316 stainless steel screws

PVC sump (standard)

Manufactured from superior UV-resistant engineered polymers

Three ports: bottom 2½" OD, 2" ID S/S; inside 2" threaded FPT; two 2" threaded plugs included

All components meet or exceed ANSI/APSP 16-2011 and NSF/ANSI 50-2009a national standards and ASTM G154 UV testing exposure

Disposable plastic pre-gunite/plaster insert keeps debris out and retains sump shape during construction

Does not require use of transition glue


Replace every five years from the date of installation

4 per case

Unblockable!



New waterstop feature

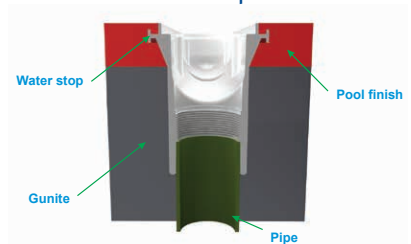

With sump (concrete pools)
Part # 32CDFLxxx

STANDARD COLORS



- 32CDFL101 – White
- 32CDFL102 – Black
- 32CDFL103 – Light Gray
- 32CDFL104 – Blue
- 32CDFL105 – Dark Gray
- 32CDFL108 – Tan

Also available as sump only
p/n 32CDPxxx
4 per case

Also available cover only without
sump/frame p/n 32CDFLNFxxx

40 per case

VGB 2008 Compliant

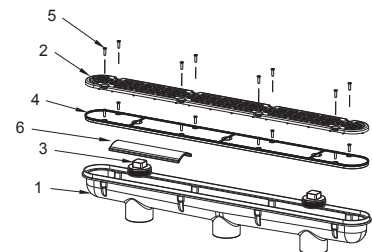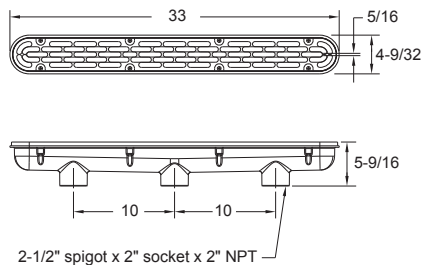

1. 32" PVC three-port sump
2. 32" channel drain cover
3. 2" NPT plug, qty 2
4. 32" channel drain, plaster shield
5. #10 x 3/4" flat head Phillips Type A screw, 316 ss, qty 16
6. Port divider

Plaster shield and screws to be removed after gunite/plaster application